

HYDRO-RAIN®
Built for Speed™

Speed Seal™
WATERPROOF WIRE CONNECTORS

Hydro-Rain's SpeedSeal™ Waterproof Wire Connectors give contractors the finger traction and easy single step installation when splicing wire as needed in wet or dry situations. Corrosion proof SpeedSeal™ connectors provide an ergonomic grip pattern and distinctive color combinations.

Silicone injected SpeedSeal™ Waterproof Connectors are for use on irrigation valves and low voltage lighting.

FEATURES AND BENEFITS

- **Metal Helical Insert**—Twists wires together (no pre-twisting required) and securely locks them into place when twisted in a clockwise direction (capable of 80# torque).
- **Ergonomic Grip**—Increases rapid turn capability and provides comfort and low hand stress.
- **High Density Material**—For extended use and reliability.

OPERATING RANGE

- **Maximum Voltage:** 600V maximum building wire (1000 max. signs or lumenaries)
- **Wire Type:** Copper/Copper

SPECIFICATIONS

- **Dimensions:**
 - Orange Connector Size: 27/32" X 7/16"
 - Orange Wire Range: Min. #22 to Max. #12
 - Blue Connector Size: 17/32" X 15/16"
 - Blue Wire Range: Min. #22 to Max. #12
 - Tan Connector Size: 13/16" X 19/16"
 - Tan Wire Range: Min. #22 to Max. #6
- **Temperature Rating:** 221°F (105°C)
- **Silicon Sealant Temperature:** -45°F to 400°F






INSTALLATION/REMOVAL INSTRUCTIONS

- Please turn off power prior to installation or removal and use in accordance with local and national codes.
 1. Strip Cover to 1/2" below the end of the wire.
 2. Straighten frayed strands or connectors.
 3. Hold wires together even at the ends.
 4. Push wires and connector together through performance entry point.
 5. Twist connector onto wires pushing in a clockwise direction (no pre-twisting of wires is needed).

PACKAGING DETAIL



CUTAWAY

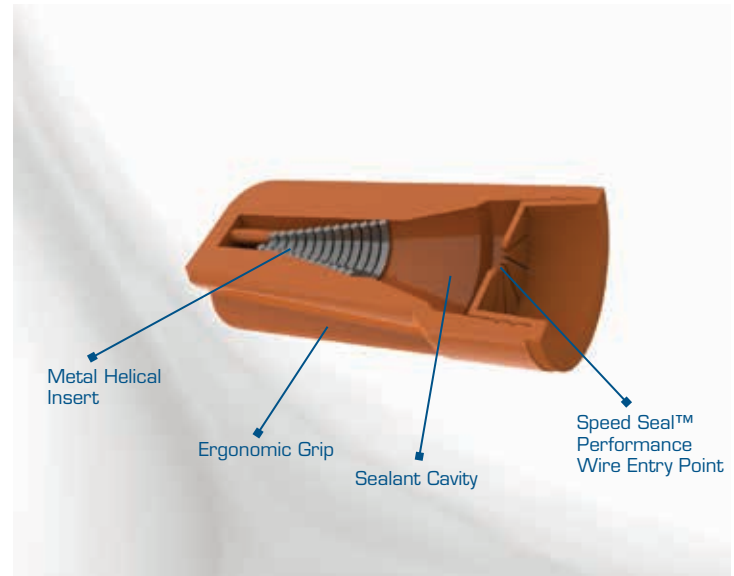

MODELS	SKU	DESCRIPTION	BAG QTY	CASE QTY
HRW-61135-PK	03127	Orange Wirenut	25	250
HRW-10222-BL	03128	Blue Wirenut	20	200
HRW-20111-TN	03129	Tan Wirenut	15	150

MODELS	SKU	DESCRIPTION	JUG QTY	CASE QTY
HRW-61146-PK	03130	Orange Wirenut	150	900
HRW-10241-BL	03131	Blue Wirenut	100	600
HRW-20136-TN	03132	Tan Wirenut	50	300

03127-36 Rev B

